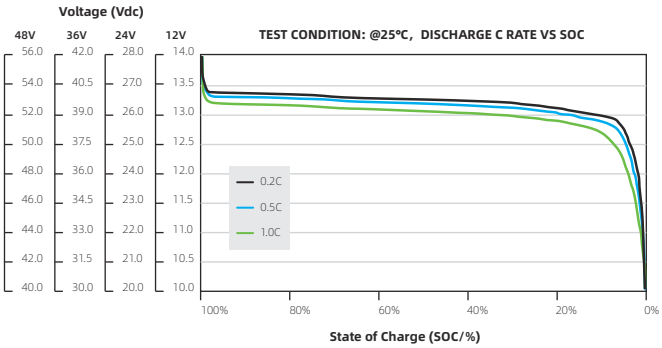
Voltage (Vdc)
48V 36V 24V 12V
TEST CONDITION: @25°C, DISCHARGE C RATE VS SOC
0.2C
0.5C
1.0C
State of Charge (SOC/%)

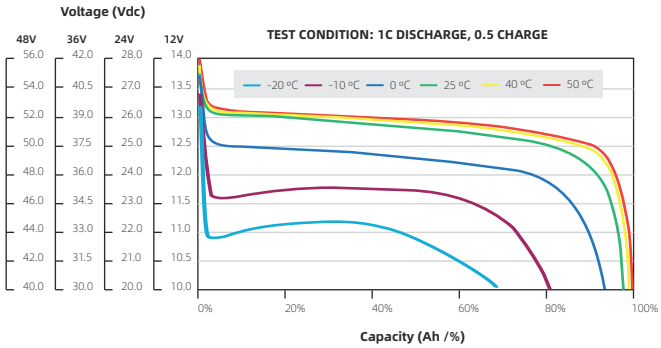
Voltage (Vdc)
48V 36V 24V 12V
TEST CONDITION: 1C DISCHARGE, 0.5 CHARGE
-20 °C
-10 °C
0 °C
25 °C
40 °C
50 °C
Capacity (Ah /%)

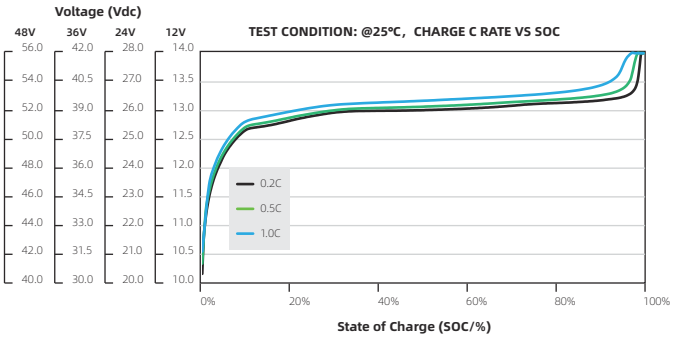
Voltage (Vdc)
48V 36V 24V 12V
TEST CONDITION: @25°C, CHARGE C RATE VS SOC
0.2C
0.5C
1.0C
State of Charge (SOC/%)

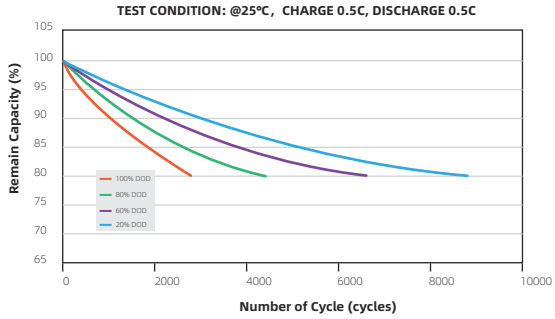
TEST CONDITION: @25°C, CHARGE 0.5C, DISCHARGE 0.5C
Remain Capacity (%)
100% DOD
80% DOD
60% DOD
20% DOD
Number of Cycle (cycles)